

# Allier Outdoor Chandelier

**OLF3294/5 1.0**

## GENERATION LIGHTING OUTDOOR

### GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.


This instruction shows a typical installation.

### CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


**Use minimum 90°C supply conductors.**

**SAVE THESE INSTRUCTIONS!**

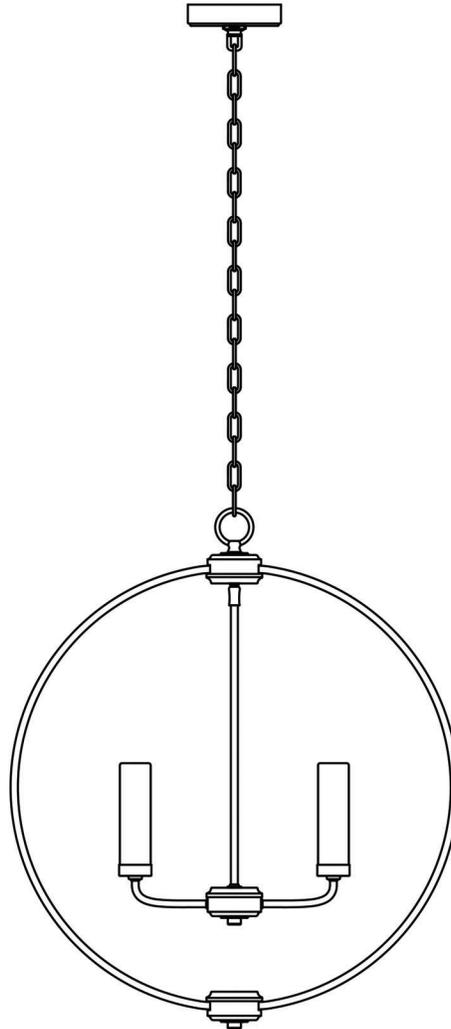

GENERATION LIGHTING  
7400 Linder Ave., Skokie, IL 60077  
T 847.410.4400 | F 847.410.4500  
[www.generationlighting.com](http://www.generationlighting.com)

# Install the Fixture

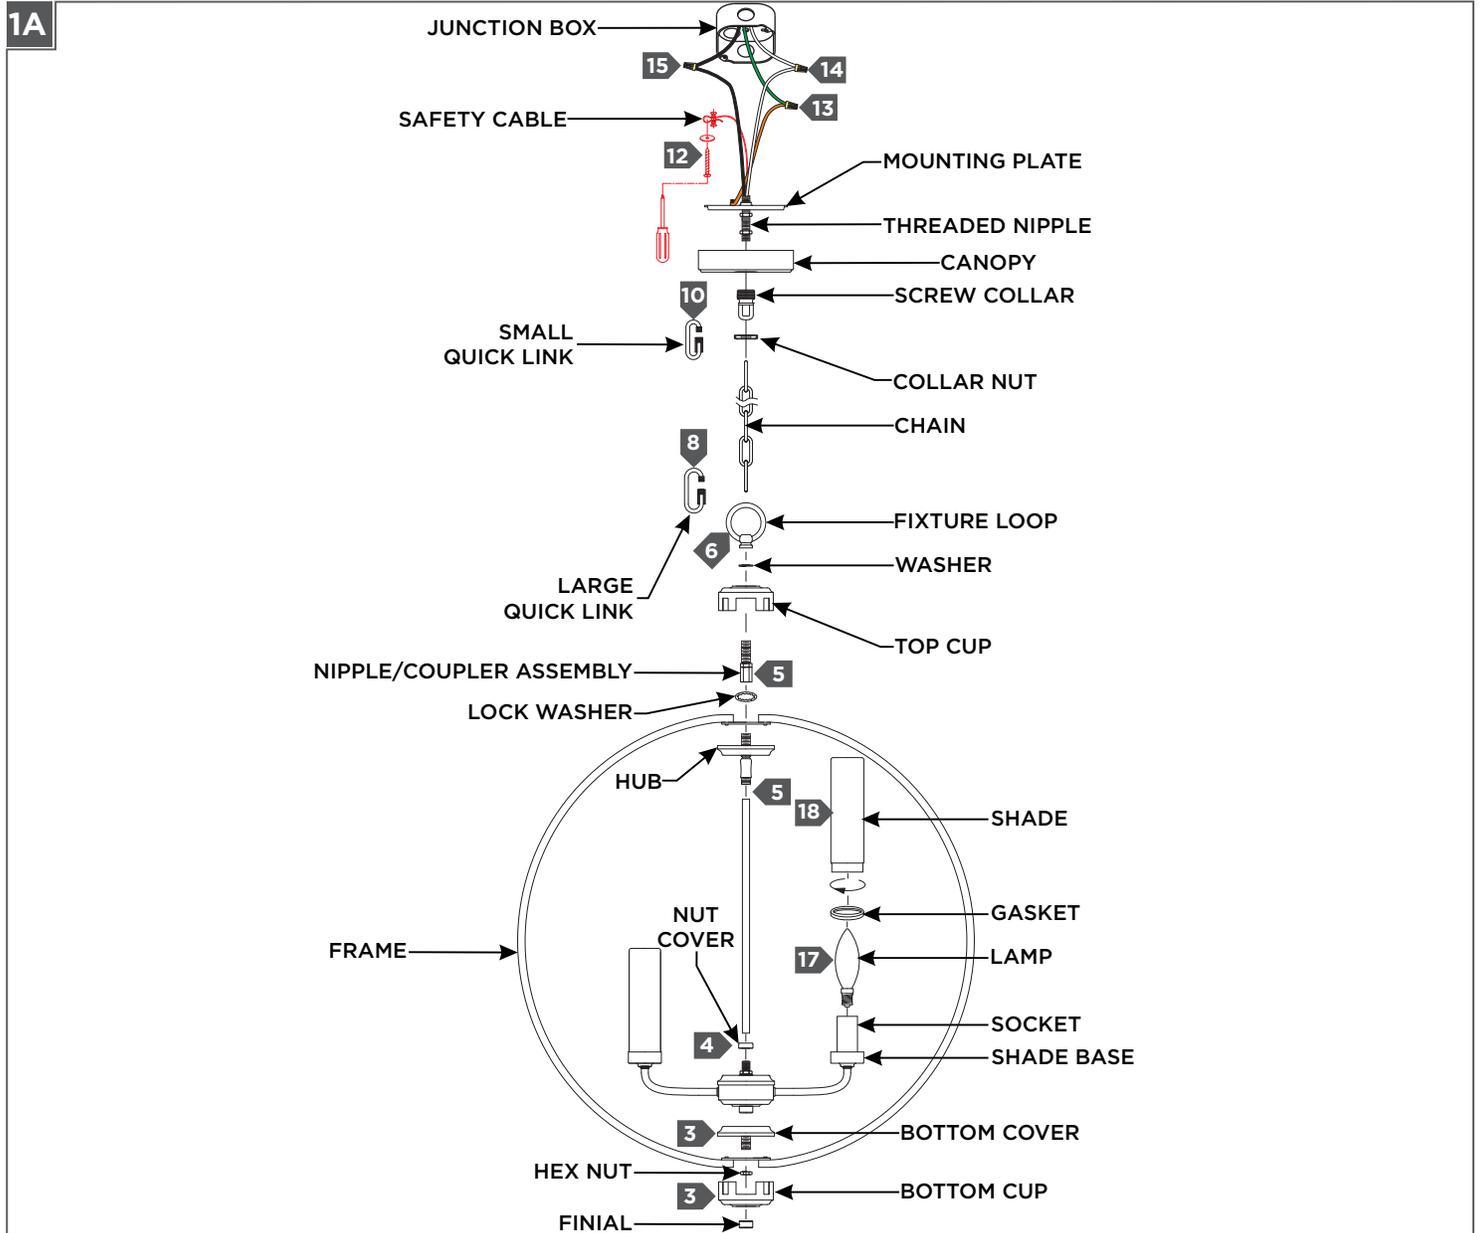

- 1** If necessary, screw the short end of the threaded nipple tightly onto the mounting plate and the screw collar onto the threaded nipple.
- 2** Secure the mounting plate to the junction box.
- 3** Install the bottom cover to the frame and secure it in place using the hex nut. Install the bottom cup on the bottom of the frame and secure it in place using the finial.
- 4** Feed the fixture wires and safety cable through the nut cover and stem, then screw the stem onto the fixture.
- 5** Feed the fixture wires and safety cable through the hub, frame, lock washer, and nipple/coupler assembly, then assemble them by screwing them together.
- 6** Feed the fixture wires and safety cable through the top cup, washer, and fixture loop, then secure them together by screwing the fixture loop onto the nipple/coupler assembly.
- 7** Determine the wanted height of the fixture and remove a portion of the chain from the bottom by opening a link with pliers.
- 8** Install the large quick link to bottom end of the chain, then secure the quick link onto the fixture loop.
- 9** Unscrew the collar nut from the screw collar, then install the collar nut, and the canopy onto the chain (in that order).
- 10** Install the small quick link onto the remaining end of the chain, then secure the quick link onto the screw collar
- 11** Weave the cord and safety cable through the chain, collar nut, canopy, screw collar, threaded nipple, and out of the junction box. Trim the cord leaving enough to make electrical connections.
- 12** Install the safety cable in accordance to local building codes.
- 13** Connect the fixture to a suitable ground in accordance to local electrical codes.
- 14** Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 15** Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 16** Neatly place all the wires into the junction box, place the canopy onto the mounting plate, and secure it in place by screwing the collar nut onto the screw collar.
- 17** Screw the lamps into the sockets. Refer to the label on the lamp socket for Max Wattage Information.
- 18** Install the gasket over the socket and onto the shade base, then install the shade by screwing it into the shade base. Repeat for remaining shades.