

Ellis Harper 3 Light Pendant

6513703 1.0

GENERATION LIGHTING

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

This instruction shows a typical installation.


GENERATION LIGHTING

7400 Linder Ave, Skokie, IL 160077

800.969.3347


www.visualcomfort.com

©2023 Visual Comfort & Co.. All rights reserved. The Visual Comfort & Co. logo is a registered trademark of Visual Comfort & Co. Visual Comfort & Co. reserves the right to change specifications for product improvements without notification

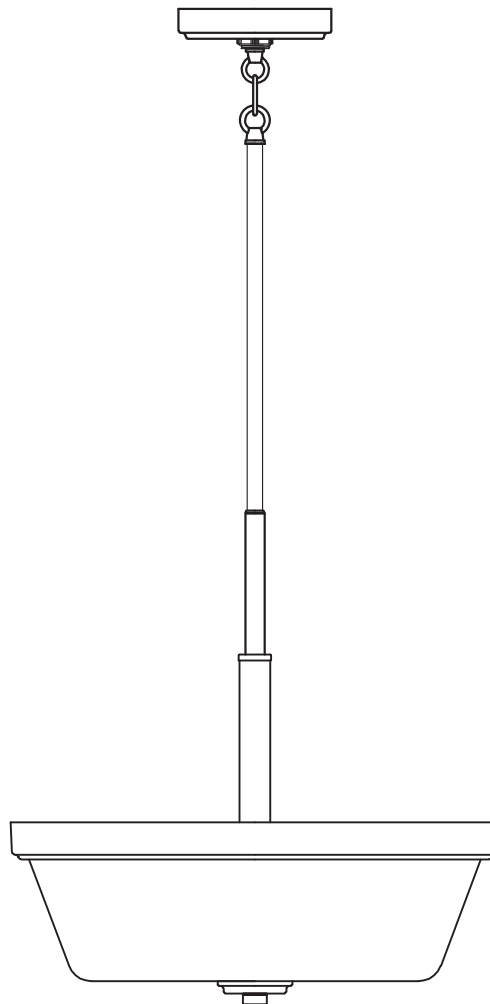

SAVE THESE INSTRUCTIONS!

Install the Fixture

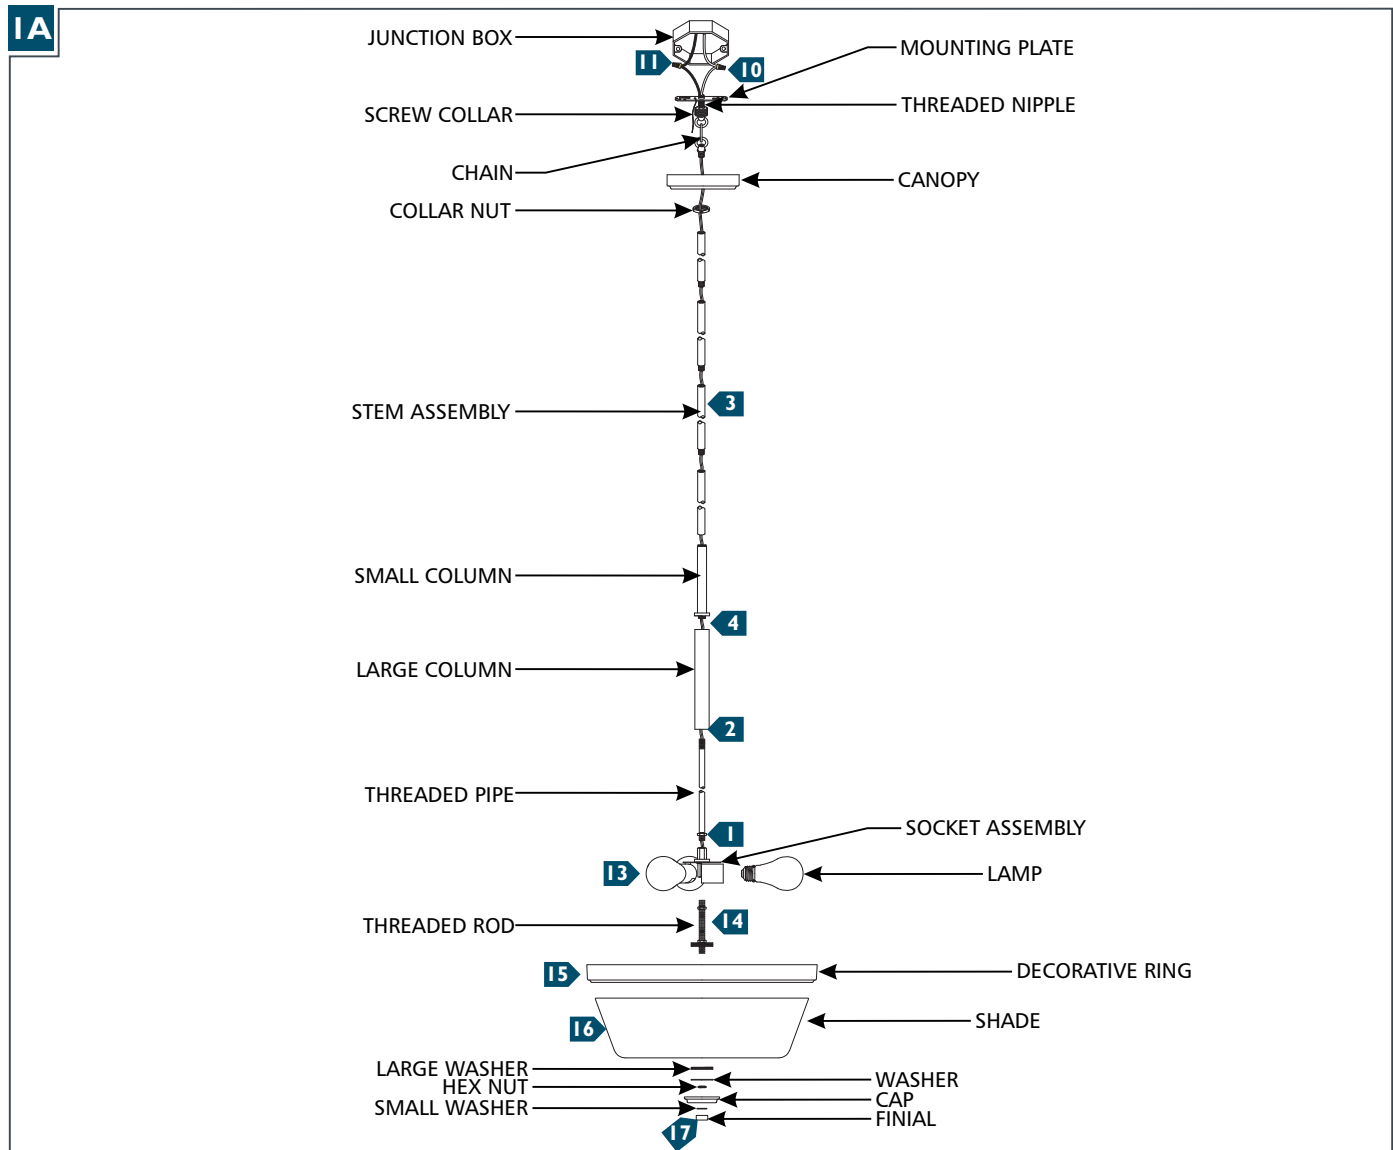

- 1** Feed the fixture wires through the threaded pipe, then screw the pipe onto the fixture.
- 2** Feed the fixture wires through the large and small columns, then slide them over the threaded pipe and secure them in place by screwing the small column onto the pipe.
- 3** Determine the wanted height or look of the fixture with the provided stems and chain, then assemble them by screwing them together.
- 4** Feed the fixture wires through the stem/chain assembly, then screw the stem assembly onto the small column.
- 5** If necessary, screw the threaded nipple tightly onto the mounting plate.
- 6** Install the collar nut and canopy onto the stem assembly.
- 7** Feed the fixture wires through the mounting plate/nipple assembly and screw the screw collar onto the threaded nipple.
- 8** Align and secure the mounting plate to the junction box.
- 9** Connect the fixture to a suitable ground in accordance to local electrical codes.
- 10** Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 11** Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 12** Neatly place all the wires into the junction box, place the canopy onto the ceiling, and secure it in place by screwing the collar nut tightly onto the screw collar.
- 13** Screw the lamps into the sockets. Refer to the label on the socket for Max Wattage Information.
- 14** Screw the threaded rod into the bottom of the socket assembly.
- 15** Place the decorative ring on top of the shade.
- 16** Lift the shade up to the threaded nipple and secure it in place with a large washer, washer and hex nut.
- 17** Place the cap and small washer onto the threaded nipple and secure in place with the finial.