

Wyatt Large Pendant

700TDWYT_

1.1



PENDANT

GENERAL PRODUCT INFORMATION:

This product is suitable for indoor locations.

Dimmable with most LED compatible TRIAC and 0-10V dimmers.

This instruction shows a typical installation.




CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.


SAVE THESE INSTRUCTIONS!

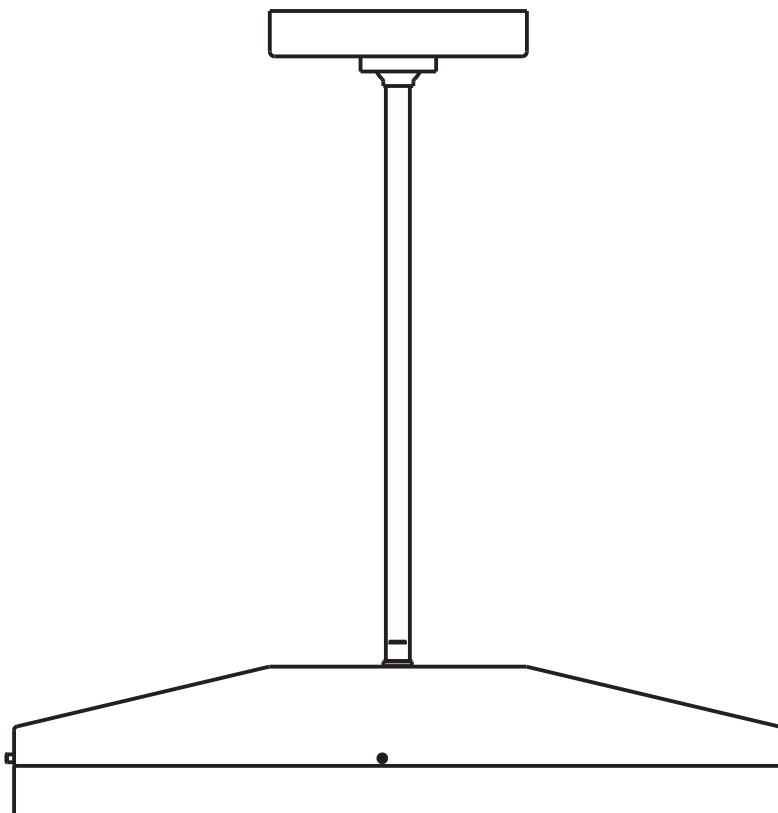

7400 Linder Ave., Skokie, IL 60077
T 847.410.4400 | F 847.410.4500
www.techlighting.com

Install the Fixture

1A

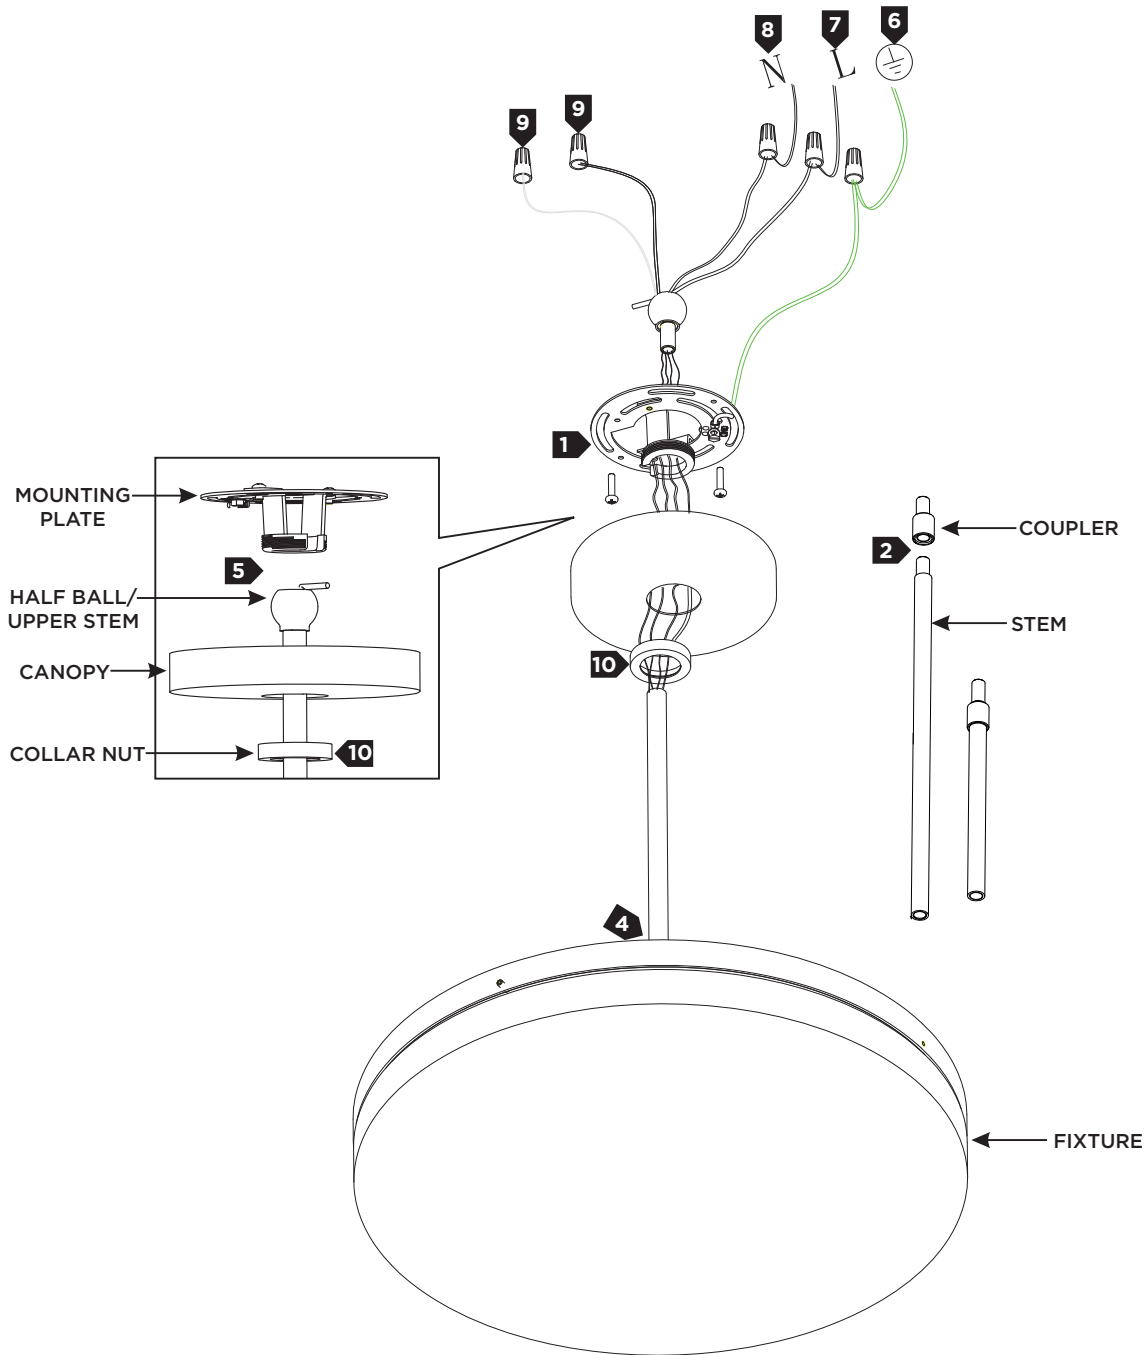

- 1 Install the mounting plate to the electrical box with the two provided #8-32 screws.
- 2 Determine the desired height of the fixture using the provided stems, couplers, and half ball/upper stem and assemble them by screwing them together.
- 3 Slide the canopy, then the collar nut onto the half ball/stem assembly.
- 4 Feed the fixture wires through the stem assembly, then screw the stem assembly to the top of the fixture base.
- 5 Seat the half ball into the mounting plate ensuring no wires are being pinched.
- 6 Connect the fixture to a suitable ground in accordance with local electrical codes.
- 7 Connect the white input driver wire to the neutral power line wire with a wire nut.
- 8 Connect the black input driver wire to the hot power line wire with a wire nut.
- 9 For 0-10V dimming, use the purple and pink wires to connect to a compatible dimmer. If not using dimming, make sure to cap off these wires.
- 10 Neatly place the wires and wire nut connections inside the canopy/electrical box, then slide the canopy up over the mounting plate and secure in place with the collar nut.