

Hadley Chandelier

LC1134, LC1144, LC1156 | 1.0

GENERATION LIGHTING CHANDELIER

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.


This product is safety listed for damp locations.

Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

This instruction shows a typical installation.


CAUTION - RISK OF FIRE
 This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
 Use minimum 90°C supply conductors.

SAVE THESE INSTRUCTIONS!

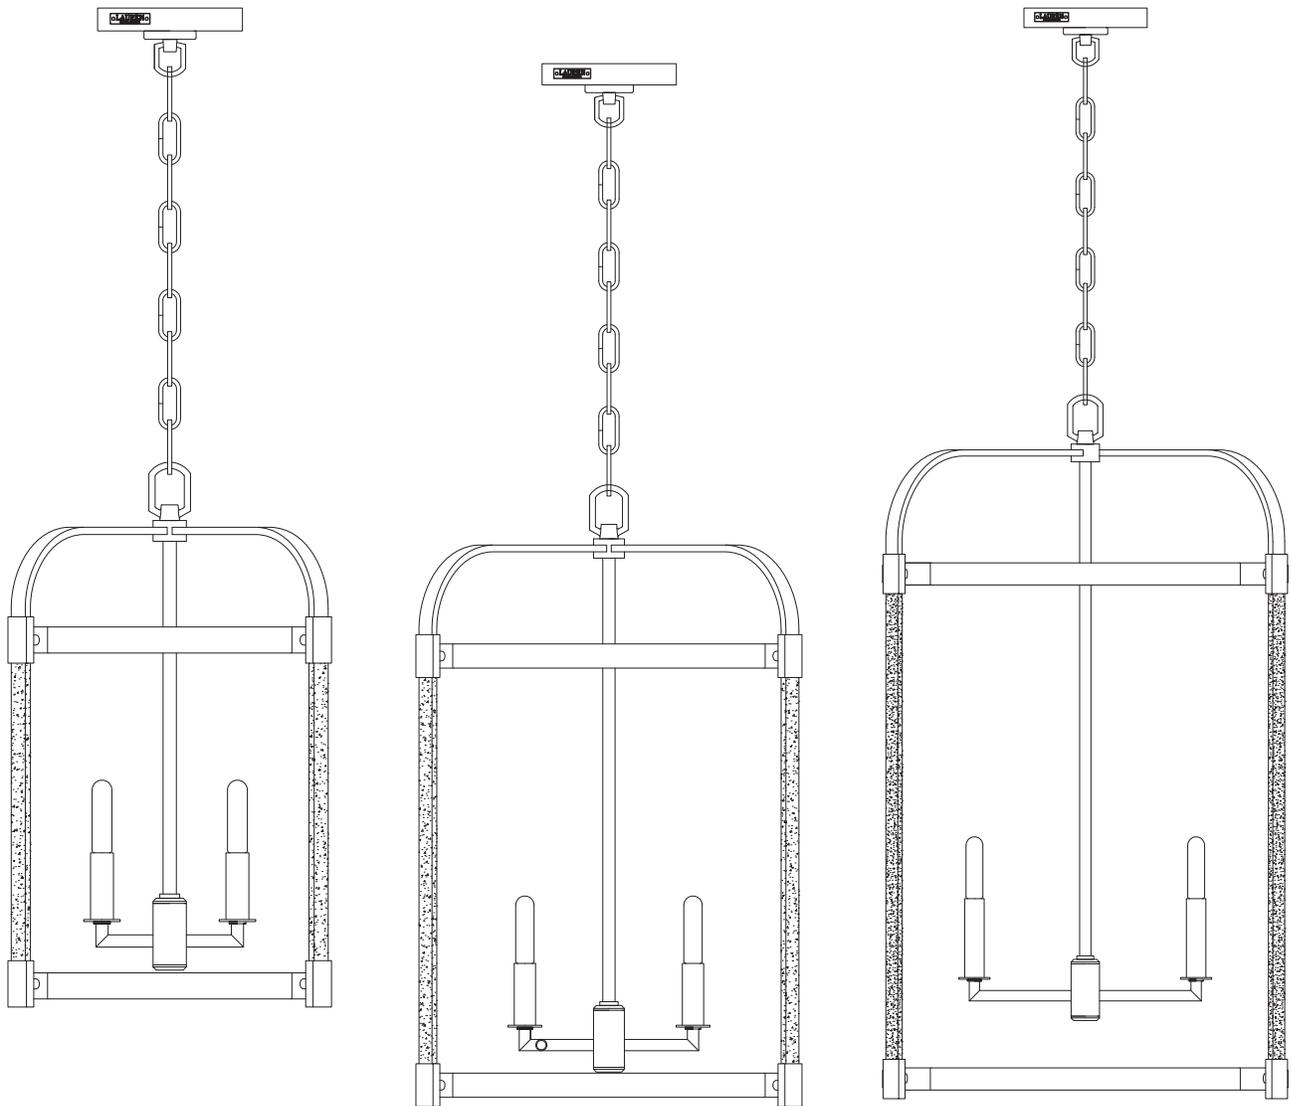

GENERATION LIGHTING
 7400 Linder Ave., Skokie, IL 60077
 T 847.410.4400 | F 847.410.4500
www.generationlighting.com

Install the Fixture

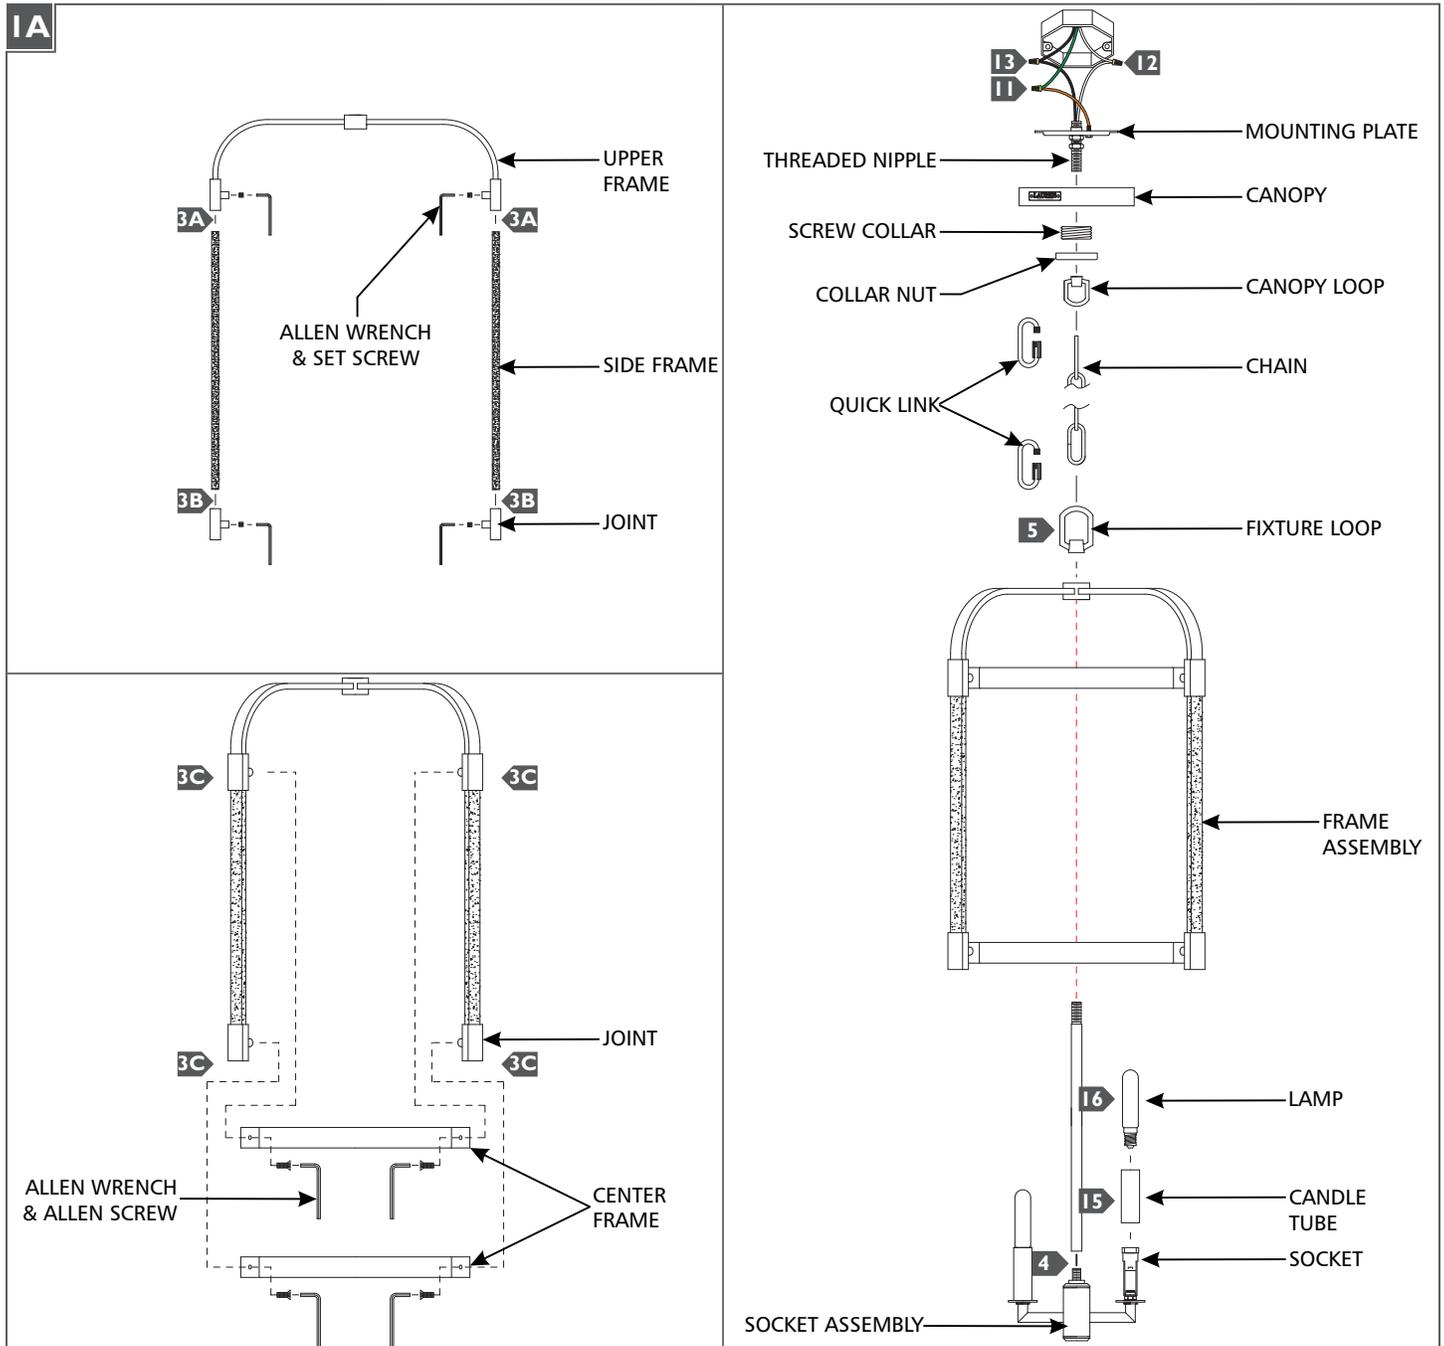

- 1** If necessary, screw the short end of the threaded nipple onto the mounting plate, then screw the screw collar and canopy loop onto the threaded nipple.
- 2** Secure the mounting plate to the junction box.
- 3** **Assemble the Frame:** **A)** Insert the side frame (make sure the stitches on the leather face the center of the fixture) into the upper frame and secure them with the set screws using the small provided Allen wrench. **B)** Install the joints to the ends of the side frames and secure them together with the set screws using the provided small Allen wrench. **C)** Install the center frames (make sure the drain holes, if any, are facing up) onto side frame joints with fixture screws using the large provided Allen wrench. Adjust the frames if needed.
- 4** Feed the fixture wires the stem and screw it onto the socket assembly.
- 5** Feed the fixture wires through the frame assembly and fixture loop, then secure the frame assembly to the stem by screwing the fixture loop onto the stem.
- 6** Determine the wanted height of the fixture and remove a portion of the chain from the bottom by opening a link with pliers.
- 7** Install a quick link to bottom end of the chain, then secure the quick link onto the fixture loop.
- 8** Unscrew the collar nut from the screw collar, then install the collar nut and the canopy onto the chain (in that order).
- 9** Install a quick link onto the remaining end of the chain, then secure the quick link onto the canopy loop.
- 10** Weave the cord through the chain, collar nut, and canopy, threaded nipple, and out of the junction box. Trim the cord leaving enough to make electrical connections.
- 11** Connect the fixture to a suitable ground in accordance to local electrical codes.
- 12** Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 13** Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 14** Neatly place all the wires into the junction box, place the canopy onto the mounting plate, and secure it in place by screwing the collar nut tightly onto the screw collar.
- 15** Install the candle tubes by sliding them over the sockets.
- 16** Screw the lamps into the sockets. Refer to the label on the lamp socket for Max Wattage information.