

# Rhett Flush Mount

7569093S | 1.1

## GENERATION LIGHTING

### GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.


This instruction shows a typical installation.

### CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

**SAVE THESE INSTRUCTIONS!**

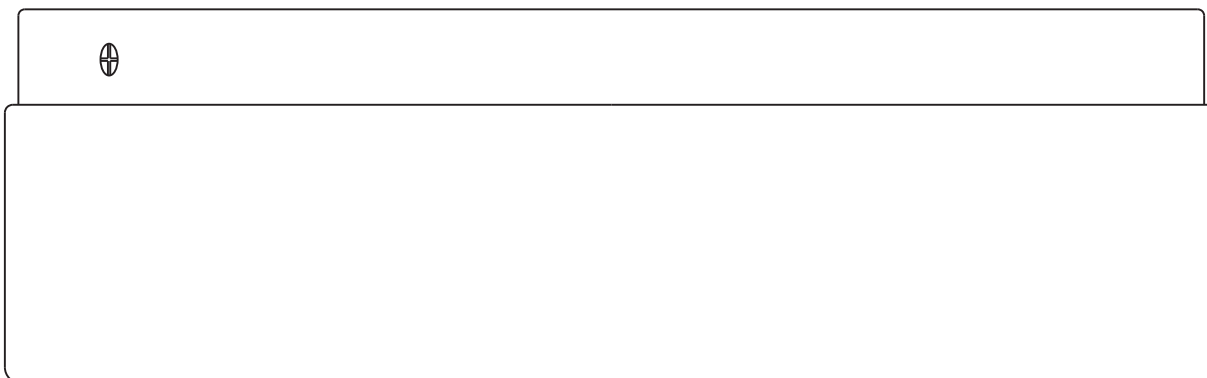

### GENERATION LIGHTING


7400 Linder Ave., Skokie, IL 60077

T 847.410.4400 | F

847.410.4500

[www.visualcomfort.com](http://www.visualcomfort.com)

## Install the Fixture

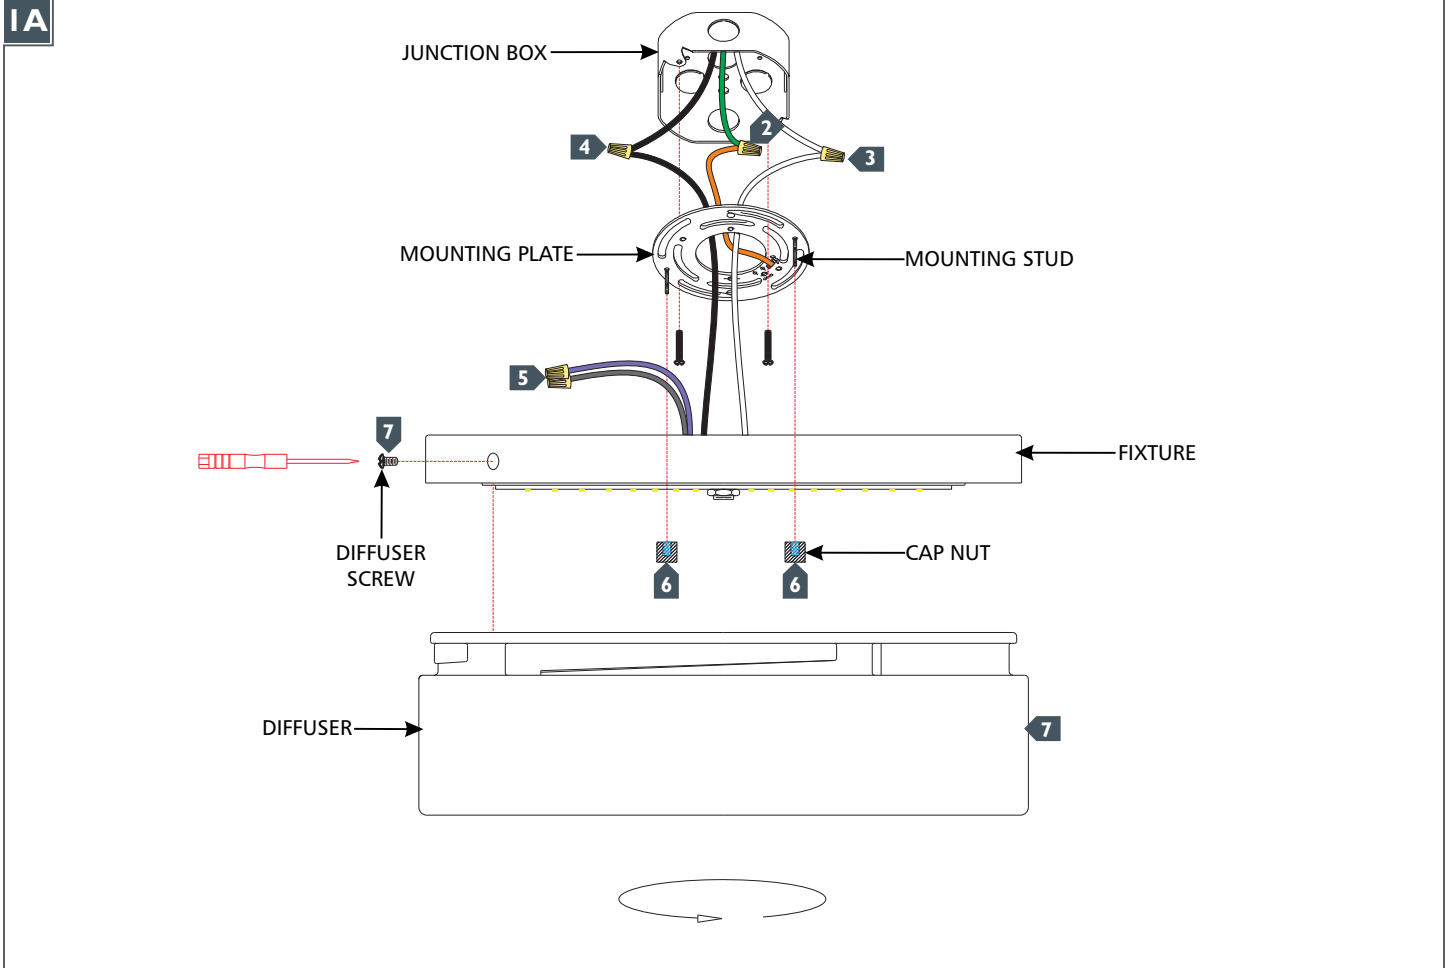

- 1** Secure the mounting plate to the junction box.
- 2** Connect the fixture to a suitable ground in accordance with local electrical codes.
- 3** Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 4** Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 5** If using dimming, connect the purple and gray wires to a compatible dimmer. If not using dimming, make sure to cap the purple and gray wires.
- 6** Neatly place all the wires into the junction box, place the fixture onto the mounting studs, and secure it in place by screwing the cap nuts onto the studs.
- 7** Align the diffuser to the fixture, screw it in the fixture, and secure it in place with the diffuser screw.