

**VISUAL COMFORT & Co.**


MODERN COLLECTION

**GENERAL PRODUCT INFORMATION:**




This product is suitable for damp locations.

This product can mount to either a 4" square electrical box with round plaster ring or an octagon electrical box.

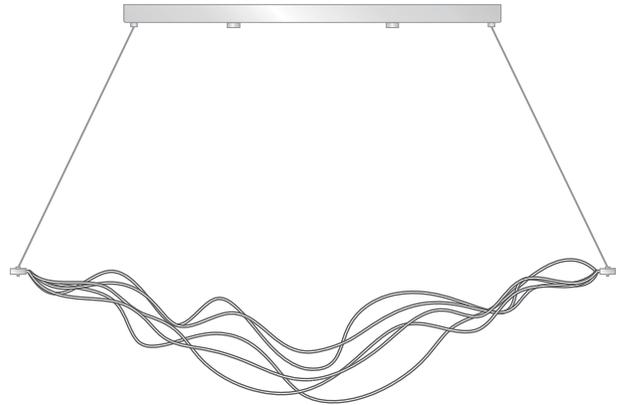


**CAUTION - RISK OF FIRE**  
This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.  
Use minimum 90°C supply conductors.


**Install the Mounting Plate**

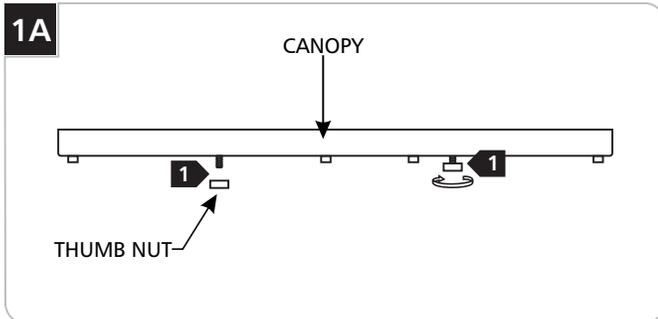


**1** Separate the mounting plate from the canopy by first unscrewing and removing the two thumb nuts.

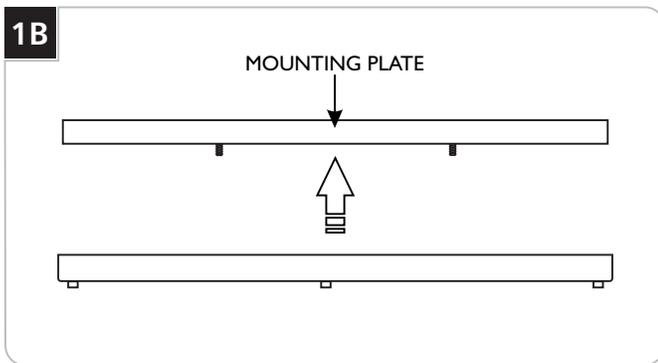


**2** Remove the mounting plate from the canopy.

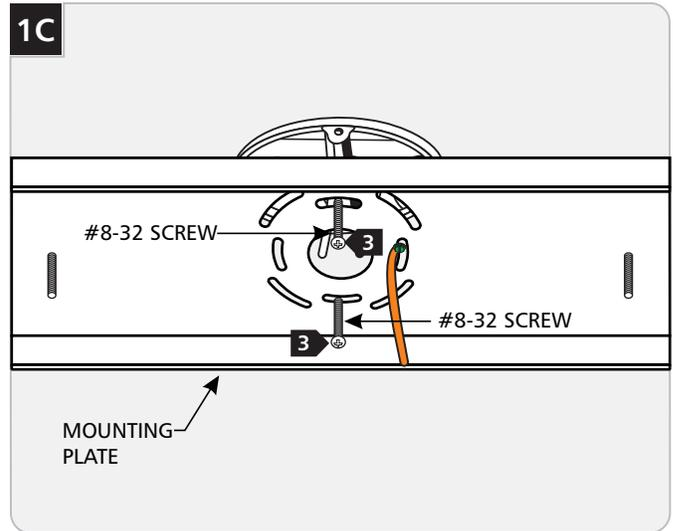

**3** Secure the mounting plate to the electrical box with the two #8-32 screws provided.

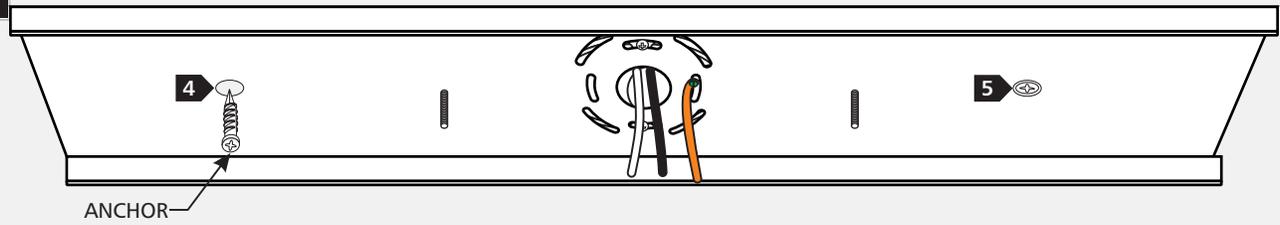
**1D**

- 4 Line up an anchor with the center of a backplate hole and push the anchor in up to the threads.
- 5 Screw the anchor the rest of the way in with a screwdriver.

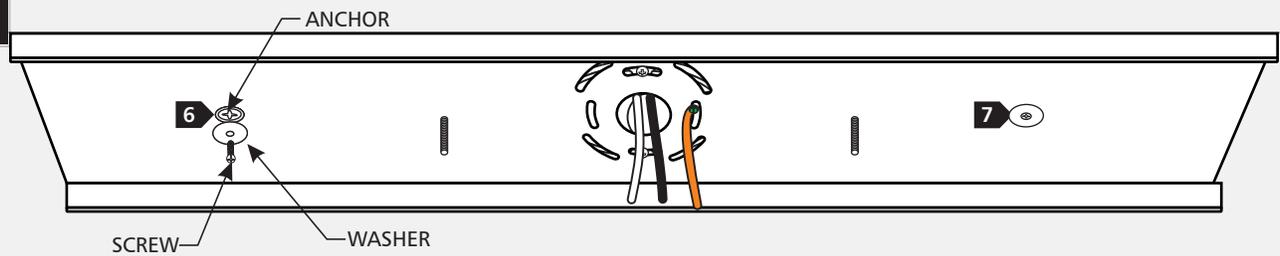**1E**

- 6 Secure the backplate to the anchor with a screw and washer.
- 7 Repeat steps 4-6 for the remaining anchor hole.

## Adjust the Length (optional)

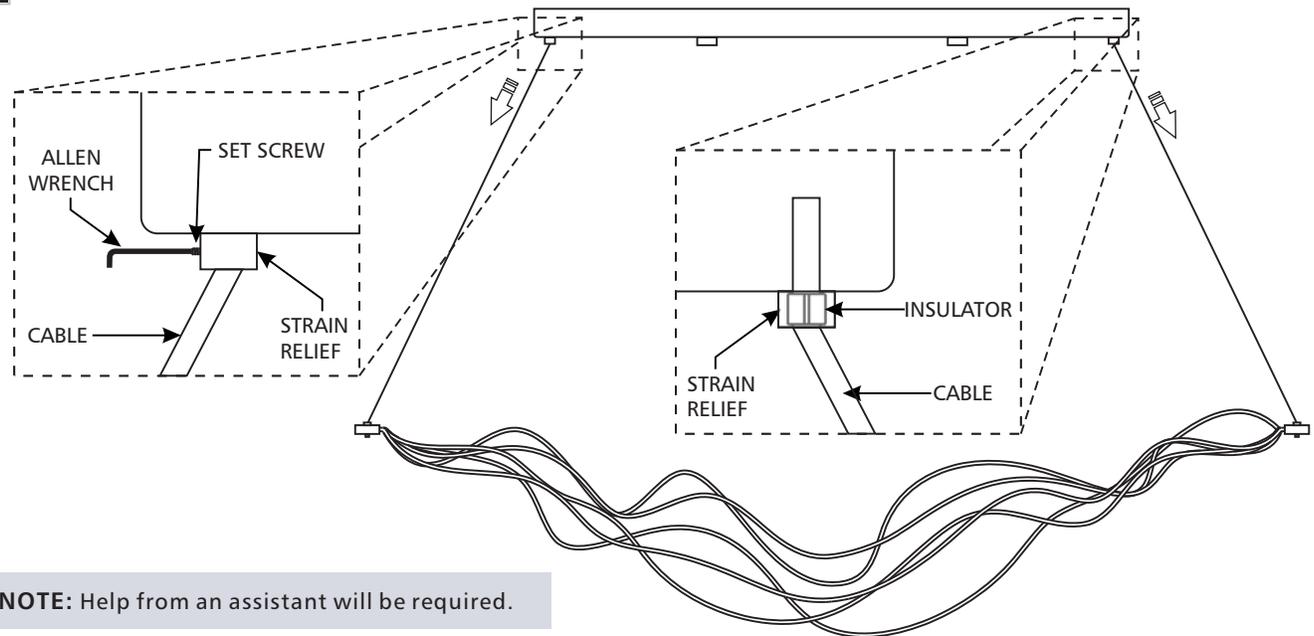**2A**


**NOTE:** Help from an assistant will be required.

- 1 While supporting the fixture, loosen the set screws on each strain relief using the provided set screws.
- 2 Slowly and evenly pull out the cables down to the desired length. **Caution:** Do not pull the cords up through the canopy. It is not recommended to further shorten the fixture from its original length. If shortening is absolutely necessary, ensure the white plastic insulator stays in place within the strain relief.
- 3 Make sure that the fixture is level and re-tighten the set screws.

## Install the Fixture


**NOTE:** It is recommended that one person hold the fixture while the electrician connects the power and installs the canopy.

**3A**

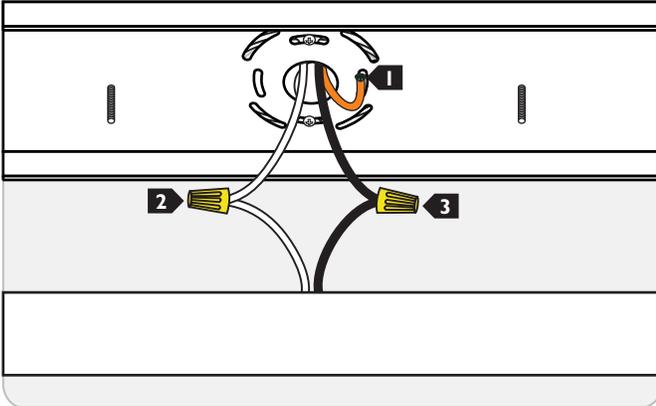

- 1 Connect the fixture to a suitable ground in accordance with local electrical codes.
- 2 Connect the white fixture wire to the neutral power line wire with a wire nut.
- 3 Connect the black fixture wire to the hot power line wire with a wire nut.

**3B**

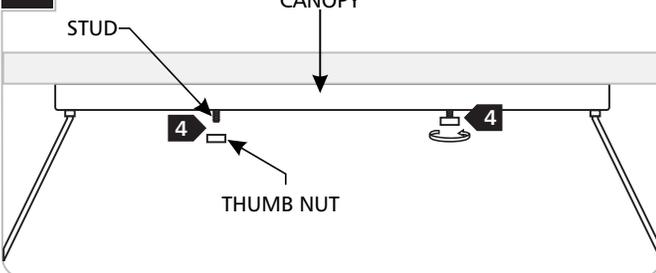

- 4 Re-install the canopy by aligning the studs of the mounting plate to the holes in the canopy and secure it in place with the two thumb nuts.

**SAVE THESE INSTRUCTIONS!**

VISUAL COMFORT & CO.

7400 Linder Ave, Skokie, IL 160077

800.969.3347

**[www.visualcomfort.com](http://www.visualcomfort.com)**

©2023 Visual Comfort & Co.. All rights reserved. The Visual Comfort & Co. logo is a registered trademark of Visual Comfort & Co. Visual Comfort & Co. reserves the right to change specifications for product improvements without notification